

Ductile Iron Butterfly Valves PN16/235PSI/Class125

Lug Style, Pin-Free Valve Shaft, Seal-Line Seat
Design to BS5155 and MSS SP-67
Flange Dimension to EN1092-2, ANSI B16.1 Class 125

Sealing Performance	
EPDM	-20°C- 120°C
NBR	-10°C- 80°C
VITON	-20°C- 150°C

Hydraulic Pressure Test	
Body	2.4Mpa/24Bar
Seat	1.76Mpa/17.6Bar

Materials List


No	Part	Specification	BS EN	ASTM
1	Body	Ductile Iron	BSEN 1563	A536 65-45-12
2	Bottom Stem	Stainless Steel	BSEN 10088-1	A582 420
3	Disc	Ductile Iron Stainless Steel Aluminum Bronze	BSEN 1563 BS970 304S15 1400AB2	A536 65-45-12 CF8 B148 Ay 954
4	Upper Stem	Stainless Steel	BSEN 10088-1	A582 420
5	Seat	EPDM NBR VITON	EPDM NBR VITON	EPDM NBR VITON
6	Bushing	Composite Material	PTFE&Bronze	PTFE&Bronze
7	Retaining Cap	Steel	BSEN 10087	A307
8	Gearbox	Ductile Iron	BSEN 1563	A536 65-45-12

* Suffix - G for operation by worm gear, - O for polished rod
* An electric or pneumatic actuator may be mounted to match an ISO5211-based mount.
Please refer to the TALOAR Butterfly Valve Torque Table in Page 50.



HB960-G/O

14" - 32"

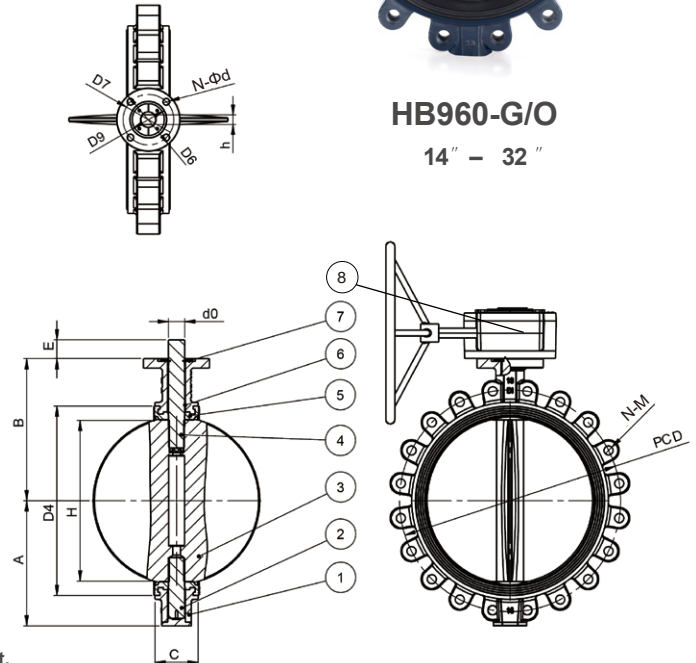

Dimensions-Weights

mm		350	400	450	500	600	700	800
In		14	16	18	20	24	28	32
A		272	296	330	360	447	517	567
B		320	340	375	430	564	616	666
C		78	102	114	127	154	165	190
E		45	50	50	60	60	80	80
H		322.6	374.4	424.2	473.2	572.0	673.0	774.0
D4		404	450	500	555	660	775	875
d0		31.60	37.95	42.86	45.72	53.98	63.35	63.35
h		24	27	27	32	36	Key18*2	Key18*2
PCD		470	525	585	650	770	840	950
N-M		16-M24	16-M27	20-M27	20-M30	20-M33	24-M33	24-M36
D6		125	175	175	175	210	300	300
D7		102	140	140	140	165	254	254
D9		70	100	100	100	130	130	130
n-Φd		4-12	4-18	4-18	4-18	4-23	8-18	8-18
ISO5211		F10	F14	F14	F14	F16	F25	F25
Weight	Lbs	137	216	262	392	419	750	926
	Kg	62	98	119	178	190	340	420

Note: Steam services are not recommended.